



PHCH MODEL

EYENUTS

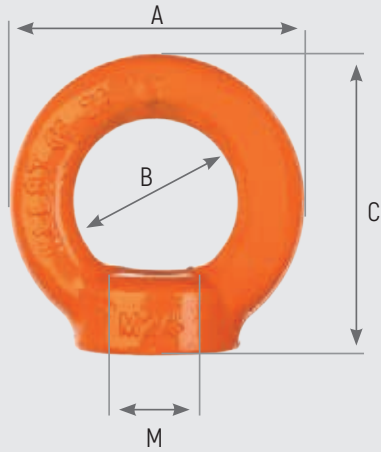

Features:

- Lightweight and reliable.
- Safety factor 4:1
- Metric thread.
- It should be bolted on a flat surface.

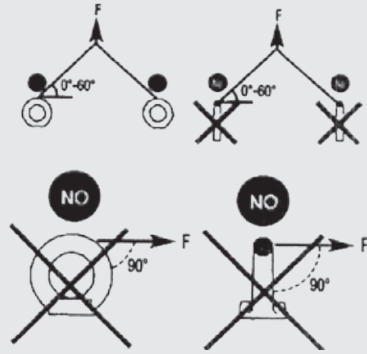

Note: Manufactured in grade 80 steel.

| MODEL | DIN 13 PITCH | A | B | C | WEIGHT |
|-------|--------------|-----|----|-----|--------|
| M 6 | 1,00 | 28 | 20 | 36 | 0,07 |
| M 8 | 1,25 | 36 | 20 | 36 | 0,07 |
| M 10 | 1,50 | 45 | 25 | 45 | 0,11 |
| M 12 | 1,75 | 54 | 30 | 53 | 0,18 |
| M 16 | 2,00 | 63 | 35 | 62 | 0,26 |
| M 20 | 2,50 | 72 | 40 | 71 | 0,40 |
| M 24 | 3,00 | 90 | 50 | 90 | 0,75 |
| M 30 | 3,50 | 108 | 60 | 109 | 1,40 |
| M 36 | 4,00 | 126 | 70 | 128 | 2,20 |
| M 42 | 4,50 | 144 | 80 | 147 | 3,10 |
| M 48 | 5,00 | 166 | 90 | 168 | 5,00 |


WORKLOADS ACCORDING TO ANGLES AND NUMBER OF FASTENING POINTS

| No OF EYEBOLTS | | 1 | | | 2 | | 3-4 | |
|---------------------|--------|--------|---------|-----------|---------|-----------|-----|--|
| | | M.W.L. | | M.W.L. | | M.W.L. | | |
| MAX. WORK LOAD (Kg) | | T | T | T | T | T | T | |
| MODEL | THREAD | 0° | 0 - 45° | 45° - 60° | 0 - 45° | 45° - 60° | | |
| | | | | | | | | |
| PHCH100 | M6 | 0,40 | 0,14 | 0,10 | 0,21 | 0,15 | | |
| PHCH200 | M8 | 1,00 | 0,35 | 0,25 | 0,52 | 0,37 | | |
| PHCH300 | M10 | 1,00 | 0,35 | 0,25 | 0,52 | 0,37 | | |
| PHCH400 | M12 | 2,00 | 0,70 | 0,50 | 1,05 | 0,75 | | |
| PHCH500 | M16 | 4,00 | 1,40 | 1,00 | 2,10 | 1,50 | | |
| PHCH600 | M20 | 6,00 | 2,10 | 1,50 | 3,15 | 2,25 | | |
| PHCH700 | M24 | 8,00 | 2,80 | 2,00 | 4,20 | 3,00 | | |
| PHCH800 | M30 | 12,00 | 4,20 | 3,00 | 6,30 | 4,50 | | |
| PHCH900 | M36 | 16,00 | 5,60 | 4,00 | 8,40 | 6,00 | | |
| PHCH1000 | M42 | 24,00 | 8,40 | 6,00 | 12,60 | 9,00 | | |
| PHCH1100 | M48 | 32,00 | 11,20 | 8,00 | 16,80 | 12,00 | | |

RECOMMENDED ACCESSORIES



SLING "DOL"
Pag. 80



WEBBING SLINGS
Pag. 90



ROUND SLINGS
Pag. 91