
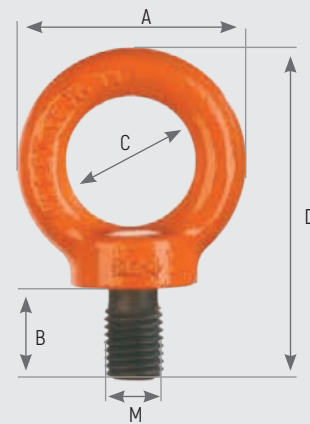


# PHCM MODEL

## EYEBOLTS

### Features:

- Lightweight and reliable.
- CSafety coefficient 4: 1.
- Metric thread.
- It should be bolted on a flat surface



**Note:** Manufactured in grade 80 steel.


MODEL	DIN 13 PITCH	A	B	C	D	WEIGHT
M 6	1,00	28	13	16	42	0,04
M 8	1,25	36	15	20	51	0,05
M 10	1,50	45	18	25	63	0,11
M 12	1,75	54	22	30	75	0,19
M 16	2,00	63	28	35	88	0,29
M 20	2,50	72	30	40	101	0,50
M 24	3,00	90	38	50	128	0,95
M 30	3,50	108	45	60	154	1,76
M 36	4,00	126	55	70	183	3,70
M 42	4,50	144	65	80	212	4,20
M 48	5,00	166	70	90	238	6,35

WORKLOAD BASED ON ANGLES AND NUMBERS OF FASTENING POINT						
No OF EYEBOLTS		1	2		3-4	
MAX. WORK LOAD (Kg)		M.W.L.	M.W.L.		M.W.L.	
MODEL	THREAD	T	T	T	T	T
		0°	0 - 45°	45° - 60°	0 - 45°	45° - 60°
PHCM100	M6	0,40	0,14	0,10	0,21	0,15
PHCM200	M8	1,00	0,35	0,25	0,52	0,37
PHCM300	M10	1,00	0,35	0,25	0,52	0,37
PHCM400	M12	2,00	0,70	0,50	1,05	0,75
PHCM500	M16	4,00	1,40	1,00	2,10	1,50
PHCM600	M20	6,00	2,10	1,50	3,15	2,25
PHCM700	M24	8,00	2,80	2,00	4,20	3,00
PHCM800	M30	12,00	4,20	3,00	6,30	4,50
PHCM900	M36	16,00	5,60	4,00	8,40	6,00
PHCM1000	M42	24,00	8,40	6,00	12,60	9,00
PHCM1100	M48	32,00	11,20	8,00	16,80	12,00

### RECOMMENDED ACCESSORIES



SLING "DOL"  
Pag. 80



WEBBING SLINGS  
Pag. 90



ROUND SLINGS  
Pag. 91