

EM MODEL MAGNETIC LIFTERS





Manual magnetic lifters are used to raise cylindrical and flat shape pieces and ferromagnetic material with a minimum thickness of 10 mm.



Their construction is compact and comfortable handling, powerful grip with safe and reliable features.

This contributes towards improving working conditions and increase the productivity.

Hence the elevators have been utilized a lot as lifting devices in factories, boiler plants, warehouses and transportation.


LOAD CONDITIONS	MODEL	MÁX. WORK LOAD (Kg)	MIN. THICKNESS (mm)*
 PLAIN	EM-1	100	30
	EM-3	300	40
	EM-6	600	50
	EM-10	1.000	60
	EM-20	2.000	70
	EM-30	3.000	80
 ROUND	EM-1	30	15
	EM-3	100	20
	EM-6	200	25
	EM-10	300	30
	EM-20	600	35
	EM-30	1.000	40

* Minimum thickness so that the lift works 100% load.

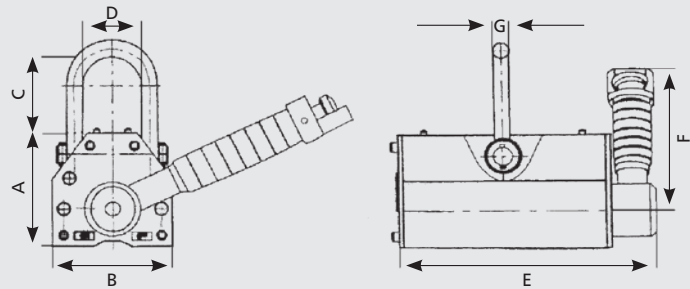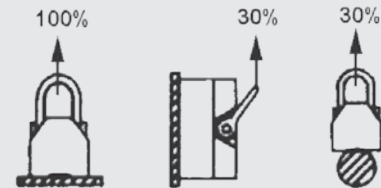

MODEL	MÁX. WORK LOAD (Kg)	MAIN DIMENSIONS (mm)							NET WEIGHT (Kg)
		A	B	C	D	E	F	G (Ø)	
EM-1	100	70	60	52	30	130	145	8	2,7
EM-3	300	96	88	65	45	207	177	12	9,4
EM-6	600	120	120	88	60	280	220	16	22,8
EM-10	1.000	169	169	135	94	319	284	20	52,2
EM-20	2.000	214	226	192	121	438	460	28	130
EM-30	3.000	263	298	220	160	510	575	32	244

RECOMMENDED ACCESSORIES



SLING "SO"
Pag. 80



WEBBING SLINGS
Pag. 90



ROUND SLINGS
Pag. 91