


BT MODEL

MULTIPOSITION CLAMPS



The "BT" model JAGUAR multiposition clamps is equipped with an articulated lifting ring for lifting, turning over or vertically transporting steel plates whilst maintaining total gripping force on the opening.

Features:

- The lever-activated safety closing device located on one side of the device makes it easier to grip the load without any hassles.
- The lever, fitted with a strong spring, keeps the load safely blocked even when supported and there is no tension in the ring.

- The jaws are made of tempered steel, with a toothed surface. They grip the part to be transported in a positive and effective manner, thereby obtaining the optimum results.


- The hardness of the steel plates to be lifted should not be higher than HRC 37 (HB- 345).

- The minimum work load should not be below 10% of the maximum workload.

- The lifting capacity and opening are reached sideways on the body.

Note:


- The heavier the load, the stronger the grip
- It is recommended to lift a single sheet at a time.
- If the load is big, it is best to use at least two clamps with a 2 leg bridle sling or with a lifting beam.

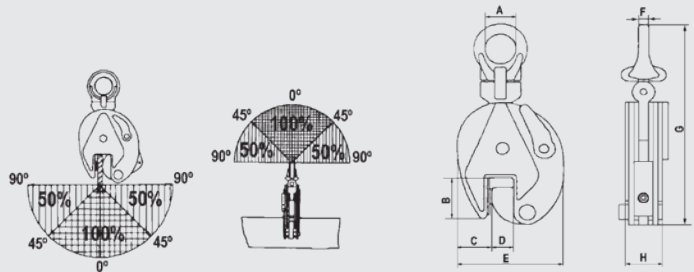

MODEL	MAX WORK LOAD (Kg)	APERTURE CAPACITY (mm.)	MAIN DIMENSIONS (mm)								WEIGHT (Kg)
			A	B	C	D	E	F	G	H	
BT-05	500	0-15	30	43	30	0-15	103	10	220	36	1,9
BT-10	1.000	0-20	48	63	52	0-20	138	12	294	55	4,6
BT-20	2.000	0-25	68	76	62	0-25	164	17	370	56	7,3
BTL-30	3.000	0-35	67	97	82	0-35	183	18	390	59	8,2
BT-30	3.000	0-30	74	85	56	0-30	193	22	425	78	15,0
BT-50	5.000	0-50	80	100	65	0-50	215	25	480	91	21,5
BT-80	8.000	50-100	77	95	87	50-100	280	25	500	92	26,5



RECOMMENDED ACCESSORIES



SLING "SO"
Pag. 80



WEBBING SLINGS
Pag. 90



ROUND SLINGS
Pag. 91



SLING "DO"
Pag. 80