

## BV MODEL

### BEAM CLAMPS




**Features:**

- For lifting and transportation of steel beams, profiles and structures when the load should be in position.
- The special shape of the ring locates the gravity centre of the beam below the ring. This maintains the balance of the beam once it has been lifted and maintains edges vertically, so that the beam can be easily stacked or positioned.
- The lifting and opening capacity are laterally etched in the body.
- The minimum workload should not be less than 10% of the maximum workload.

**Note:**

Especially recommended for transportation and stacking of steel beams.

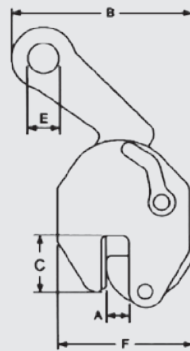

MODEL	MÁX. WORK LOAD (Kg.)	OPENING (A) (mm.)	MAIN DIMENSIONS (mm)						WEIGHT (Kg.)
			B	C	D	E	F	G	
BV-10	1.000	0-15	178	40	243	35	130	40	2,9
BV-15	1.500	0-20	280	61	385	60	165	46	7,1
BV-30	3.000	0-25	450	61	420	71	196	68	15,5

#### RECOMMENDED ACCESSORIES



SLING "SO"  
Pag. 80



WEBBING SLINGS  
Pag. 90



ROUND SLINGS  
Pag. 91