ECCPH4 - ECCGH4 MODELS

SINGLE PHASE ELECTRIC CHAIN HOISTS WITH GEARED OR PUSH TROLLEY

ONE SPEED



Features:

• IP-54 protection of the motor, IP-65 protection of the keypad.

OPTIONAL

- · Remote control for all models
- · Stainless steel chains.
- Stainless steel rotary hook for models of 500 kg and 1000 kg.

Note:


- a) Make sure that the power, voltage and frequency of the network are correct.
- b) The dimensions marked * in the table above they vary according to different elevations.
- Design, materials and specifications are subject to change without prior notification for reasons of improvement.
- d) JAGUAR electric hoists are not designed for lifting people and should not be used for this purpose.

ECCGH4 ·500 Kg - 2000 Kg. (schematic only)

Electric chain hoists with single-phase electric trolleys

ECCPH4 · 500 Kg - 2000 Kg. (schematic only)

Electric chain hoists with single-phase push trolleys

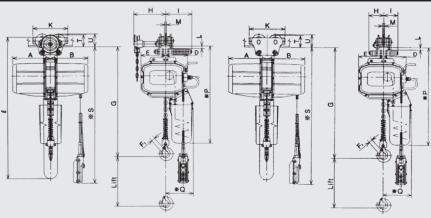

STANDARD SPECIFICATIONS											
CAPACITY (Kg)	LIFTING (m)	SPEED OF LIFTING (m/MINUTE)	POWER OF MOTOR ELEV. (KW)	SERVICE	CHAIN						
	Lii Tiivo (iii)	50 HZ	50 HZ	(MIN.)	DIA. (mm.)	No OF LEG					
500		5,2	0,8			1					
1.000	3	5,2	1,2	30	7,1	1					
2.000		2,6	1,2			2					

STANDARD SPECIFICATIONS: MOD. ECCGH4, ELECTRIC CHAIN HOISTS WITH TROLLEY CHAIN. ECCPH4, ELECTRIC HOISTS WITH PUSH TROLLEY, ONE SPEEDS, THREE-PHASE, MONOTENSION.																			
	ECCGH4 / ECCPH4													ECCGH4			ECCPH4		
CAPACITY (Kg)	WIDTH OF BEAM	MINIMUM	HEIGHT (MAX.) G (mm)	MAIN DIMENSIONS (mm)										Н	H LEN.	WEIGHT NET	Н	WEIGHT NET	
		(m)		А	В	D	Е	F1	-1	K	L	М	*P	*Q	(mm.)	(m.)	APPROX. *(Kg)	(mm.)	APPROX. *(Kg)
500	50-140	1	680		249		146	25	105	206	- 24-t2 -	-t2 b-42	650	195	b/2 +275		78	b/2 +115	71
1.000	58-140	1,5	730	24			146	30	105	206			650	195	b/2 +280	3	84	b/2 +130	77
2.000	74-165	2	855			180	134	33	128	262			685	235	b/2 +285		101	b/2 +145	94

RECOMMENDED ACCESSORIES



MULTIPOSITION CLAMPS BT MODEL Pag. 36



SLING "DOL" Pag. 80



SIMPLE POSITION CLAMPS B MODEL Pag. 37



CRANE SCALES GPJ MODEL Pag. 70