


## 580 AC SERIES CORROSION-RESISTANT PULLEY-HOLDER TROLLEYS

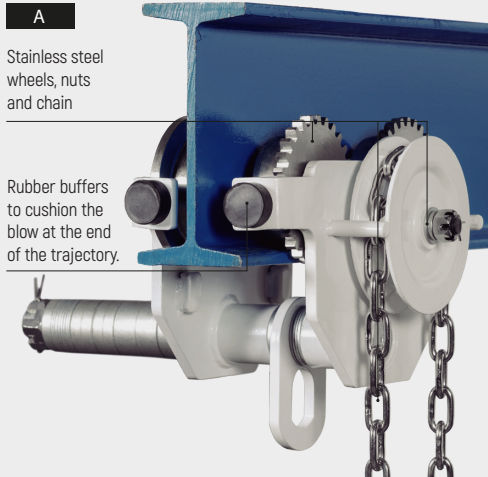

**A**  
Stainless steel wheels, nuts and chain

Rubber buffers to cushion the blow at the end of the trajectory.


The 580AC series trolleys are designed and manufactured in accordance with the requirements of ISO12944, with the highest anti-corrosion grade, up to C5-m.

This product is suitable for use in marine environments and places with high salinity.


Wheels and support capable of adapting to different types of beams (IPN, IPE and HEB) and a wide range of widths.

**Note:**

JAGUAR trolleys are not designed to move people.

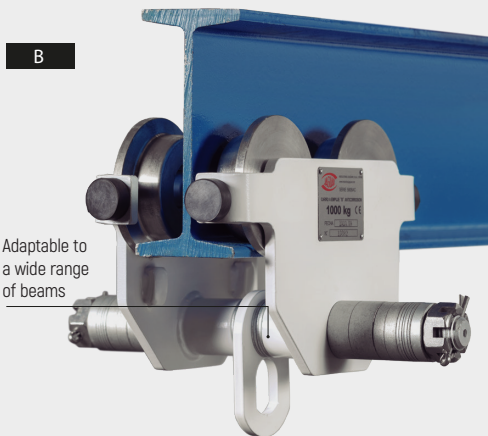

**B**  
Adaptable to a wide range of beams

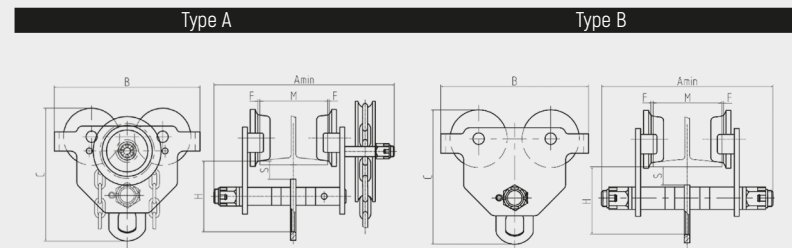

A	CODE	CAPACITY (kg)	BEAM WIDTH RANGE (mm)	WEIGHT WITH 3 m (kg)	DIMENSIONS					
					A	B	C	H	S	F
	AARAT5200	500	45-150	7	270	222	190	106	28	1,5-3
	AARAC5300	1.000	56-200	12	340	270	220	125	30	1,5-3
	AARAC5500	2.000	82-200	20	345	300	260	150	40	1,5-3
	AARAC5600	3.000	94-200	30	365	353	308	170	40	1,5-3
	AARAC5800	5.000	108-200	44	380	400	350	190	40	1,5-3
	AARAC5920	10.000	116-200	78	410	455	395	195	40	1,5-3


  

B	CODE	CAPACITY (kg)	BEAM WIDTH RANGE (mm)	WEIG (kg)	DIMENSIONS					
					A	B	C	H	S	F
	ABRAC5200	500	45-150	6	250	225	190	100	30	1,5-3
	ABRAC5300	1.000	56-200	11,5	312	270	220	122	35	1,5-3
	ABRAC5500	2.000	82-200	19	330	300	260	150	40	1,5-3
	ABRAC5600	3.000	94-200	29	350	355	308	170	40	1,5-3

RECOMMENDED ACCESSORIES



CORROSION-RESISTANT CHAIN HOISTST  
680 AC SERIES  
Pag. 31



PALFER CORROSION-RESISTANT LEVER HOISTS  
980 AC SERIES  
Pag. 33