


990 AT SERIES

«PALFER» SPARK-PROOF LEVER HOISTS



Suspension and load hook, chain guides, drive wheel and copper-plated end of chain

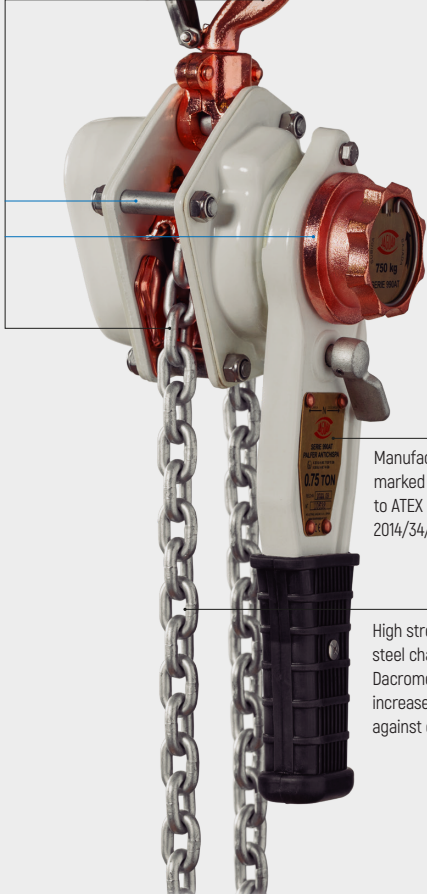

Manufactured and marked according to ATEX Directive 2014/34/EU

High strength steel chain with Dacromet finish for increased durability against corrosion

The equipment is built to be marked Group II, Category 2, Temperature class T4, for use in the presence of gases and/or vapours of combustible liquids (G) of the IIC Group, with the aim that it can be located in ATEX zones such as ZONE 1. The equipment is therefore marked as follows
Ex II 2 G Ex h IIC T4 Gb.


This equipment is also built to be marked Group II, Category 2, Maximum Surface Temperature 120°C, for use in the presence of combustible dust (D), with the aim that it can be located in ATEX zones classified ZONE 21. The equipment will therefore be marked as follows
Ex II 2 D Ex h IIIB T135°C Db.

OPTIONAL

- Rustproof load chain

0.25t-3t

6t

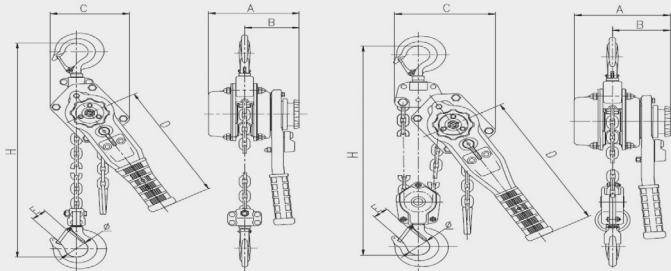


CODE	CAPACITY (kg)	No. LINKS	FORCE (N)	WEIGHT WITH 1.5 m (kg)	OPENING HOOKS (mm)	DIMENSIONS				
						A	B	C	D	H
APAAT0250	250	1	240	2,3	23	92	76	72	173	260
APAAT0500	500	1	256	5,5	23.5	152	94	115	255	290
APAAT1000	750	1	335	7	24	165	100	135	255	360
APAAT2000	1.500	1	373	13	31	178	104	145	325	400
APAAT3000	3.000	1	395	20	37	206	118	199	405	520
APAAT4000	6.000	2	398	32	46	206	118	230	405	595

RECOMMENDED ACCESSORIES



SPARK-PROOF HAND HOISTS
690 AT SERIES
Pag. 28



SPARK-PROOF PULLEY-HOLDER TROLLEYS
590 AT SERIES
Pag. 29