

BV MODEL

BEAM CLAMPS






Features:

- For lifting and transportation of steel beams, profiles and structures when the load should be in position.
- The special shape of the ring locates the gravity centre of the beam below the ring. This maintains the balance of the beam once it has been lifted and maintains edges vertically, so that the beam can be easily
- The lifting and opening capacity are laterally etched in the body.
- The minimum workload should not be less than 10% of the maximum workload.

Note:

Especially recommended for transportation and stacking of steel beams.

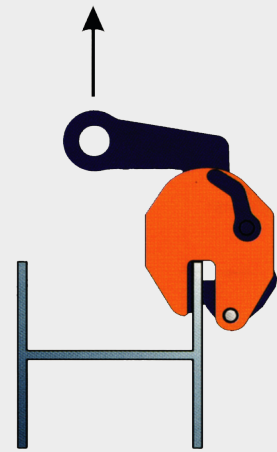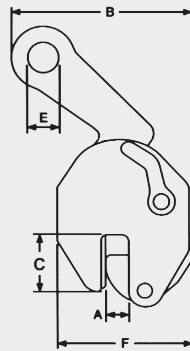

CODE	MODEL	MÁX. WORK LOAD (KG.)	OPENING (A) (mm.)	MAIN DIMENSIONS (mm)						WEIGHT (Kg.)
				B	C	D	E	F	G	
AGV10	BV-10	1.000	0-15	178	40	243	35	130	40	2,9
AGV15	BV-15	1.500	0-20	280	61	385	60	165	46	7,1
AGV30	BV-30	3.000	0-25	450	61	420	71	196	68	15,5

RECOMMENDED ACCESSORIES



SLING "SO"
Pag. 84



WEBBING SLINGS
Pag. 94



ROUND SLINGS
Pag. 95