

EM MODEL

MAGNETIC LIFTERS





Manual magnetic lifters are used to raise cylindrical and flat shape pieces and ferromagnetic material with a minimum thickness of 10 mm.



Their construction is compact and comfortable handling, powerful grip with safe and reliable features.

This contributes towards improving working conditions and increase the productivity.

Hence the elevators have been utilized a lot as lifting devices in factories, boiler plants, warehouses and transportation.


| LOAD CONDITIONS | MODEL | MÁX. WORK LOAD (KG) | MIN. THICKNESS (mm)* |
|--|-------|---------------------|----------------------|
|  PLAIN | EM-1 | 100 | 30 |
| | EM-3 | 300 | 40 |
| | EM-6 | 600 | 50 |
| | EM-10 | 1.000 | 60 |
| | EM-20 | 2.000 | 70 |
| | EM-30 | 3.000 | 80 |
|  ROUND | EM-1 | 30 | 15 |
| | EM-3 | 100 | 20 |
| | EM-6 | 200 | 25 |
| | EM-10 | 300 | 30 |
| | EM-20 | 600 | 35 |
| | EM-30 | 1.000 | 40 |

* Minimum thickness so that the lift works 100% load.

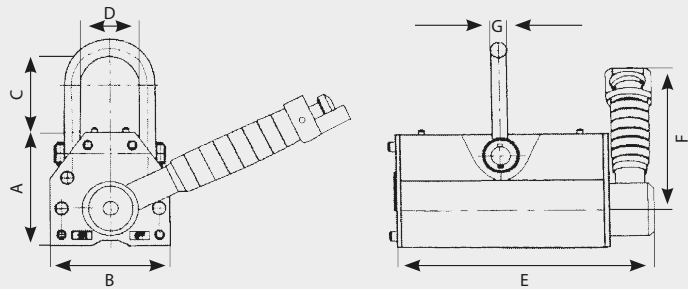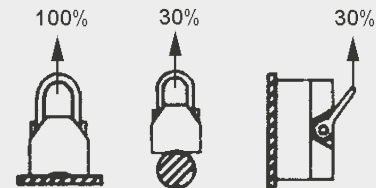


| CODE | MODEL | MÁX. WORK LOAD (Kg) | MAIN DIMENSIONS (mm) | | | | | | | NET WEIGHT (Kg) |
|---------|-------|---------------------|----------------------|-----|-----|-----|-----|-----|-------|-----------------|
| | | | A | B | C | D | E | F | G (∅) | |
| AEM1000 | EM-1 | 100 | 70 | 60 | 52 | 30 | 130 | 145 | 8 | 2,7 |
| AEM2000 | EM-3 | 300 | 96 | 88 | 65 | 45 | 207 | 177 | 12 | 9,4 |
| AEM3000 | EM-6 | 600 | 120 | 120 | 88 | 60 | 280 | 220 | 16 | 22,8 |
| AEM4000 | EM-10 | 1.000 | 169 | 169 | 135 | 94 | 319 | 284 | 20 | 52,2 |
| AEM5000 | EM-20 | 2.000 | 214 | 226 | 192 | 121 | 438 | 460 | 28 | 130 |
| AEM6000 | EM-30 | 3.000 | 263 | 298 | 220 | 160 | 510 | 575 | 32 | 244 |

RECOMMENDED ACCESSORIES



SLING "SO"
Pag. 84



WEBBING SLINGS
Pag. 94



ROUND SLINGS
Pag. 95