

# PHAS MODEL


## TRANSPORT RINGS FOR WELDING



**Features:**

- Compact shape and light weight
- Security coefficient 4:1 in all working directions.
- The ring can fold 180°.
- Weldable support bevel led on both sides, with broken edges for ultimate weld.
- They are fitted with a spring mechanism that maintains the ring in a fixed position at any angle.

**Note: Manufactured in grade 80 steel.**

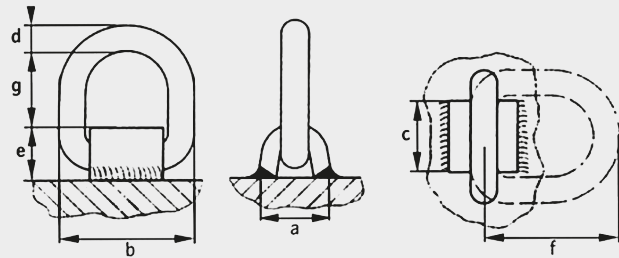

CODE	MAX. WORK LOAD (Kg)	MAIN DIMENSIONS (mm)							WEIGHT (Kg)
		A	B	C	Ø D	E	F	G	
PHAS100	1.000	38	67	37	13	33	71	34	0,39
PHAS200	2.000	40	70	40	14	35	80	40	0,44
PHAS300	3.000	43	79	44	17	38	85	40	0,70
PHAS400	5.000	61	98	50	22	48	107	50	1,40
PHAS500	8.000	70	122	65	26	53	127	65	2,30
PHAS600	15.000	88	184	89	34	70	170	85	5,75

WORKLOAD BASED ON ANGLES AND FASTENING POINT NUMBERS									
No OF EYEBOLTS	1		2		2		3-4		C.M.A.X. WORK LOAD (KG)
	M.W.L.		M.W.L.		M.W.L.		M.W.L.		
CODE	T	T	T	T	T	T	T	T	T
	0°	90°	0°	90°	0 - 45°	45° - 60°	0 - 45°	45° - 60°	
PHAS100	1,00	1,00	2,00	2,00	1,40	1,00	2,10	1,50	
PHAS200	2,00	2,00	4,00	4,00	2,80	2,00	4,20	3,00	
PHAS300	3,00	3,00	6,00	6,00	4,20	3,00	6,30	4,50	
PHAS400	5,00	5,00	10,00	10,00	7,00	5,00	10,50	7,50	
PHAS500	8,00	8,00	16,00	16,00	11,20	8,00	16,80	12,00	
PHAS600	15,00	15,00	30,00	30,00	21,00	15,000	31,50	22,50	

RECOMMENDED ACCESSORIES



SLING "DOL"  
Pag. 84



WEBBING SLINGS  
Pag. 94



ROUND SLINGS  
Pag. 95