


# PHCH MODEL


## EYENUTS

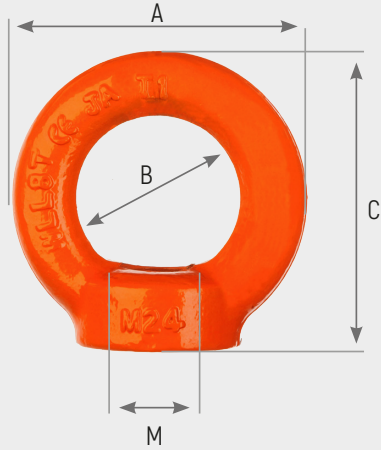

**Features:**

- Lightweight and reliable.
- Safety factor 4:1
- Metric thread.
- It should be bolted on a flat surface.

**Note:** Manufactured in grade 80 steel.

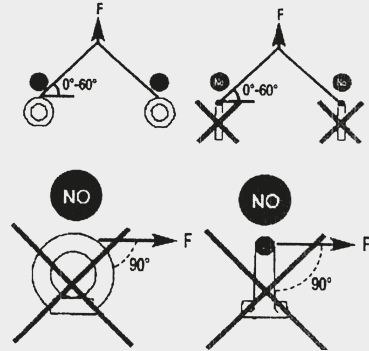

MODEL	DIN 13 PITCH	A	B	C	WEIGHT
M 6	1,00	28	20	36	0,07
M 8	1,25	36	20	36	0,07
M 10	1,50	45	25	45	0,11
M 12	1,75	54	30	53	0,18
M 16	2,00	63	35	62	0,26
M 20	2,50	72	40	71	0,40
M 24	3,00	90	50	99	0,75
M 30	3,50	108	60	109	1,40
M 36	4,00	126	70	128	2,20
M 42	4,50	144	80	147	3,10
M 48	5,00	166	90	168	5,00


**WORKLOADS ACCORDING TO ANGLES AND NUMBER OF FASTENING POINTS**

No OF EYEBOLTS		1			2		3-4	
		M.W.L.		M.W.L.		M.W.L.		
MAX. WORK LOAD (KG)		T	T	T	T	T	T	
CODE	THREAD	0°	0 - 45°	45° - 60°	0 - 45°	45° - 60°		
PHCH 06	M6	0,40	0,14	0,10	0,21	0,15		
PHCH 08	M8	0,80	0,28	0,20	0,42	0,30		
PHCH 10	M10	1,00	0,35	0,25	0,52	0,37		
PHCH 12	M12	2,00	0,70	0,50	1,05	0,75		
PHCH 16	M16	4,00	1,40	1,00	2,10	1,50		
PHCH 20	M20	6,00	2,10	1,50	3,15	2,25		
PHCH 24	M24	8,00	2,80	2,00	4,20	3,00		
PHCH 30	M30	12,00	4,20	3,00	6,30	4,50		
PHCH 36	M36	16,00	5,60	4,00	8,40	6,00		
PHCH 42	M42	24,00	8,40	6,00	12,60	9,00		
PHCH 48	M48	32,00	11,20	8,00	16,80	12,00		


**RECOMMENDED ACCESSORIES**



SLING "DOL"  
 Pag. 84



WEBBING SLINGS  
 Pag. 94



ROUND SLINGS  
 Pag. 95