
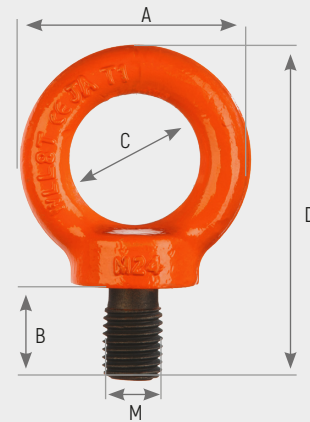


PHCM MODEL

EYEBOLTS

Features:

- Lightweight and reliable.
- CSafety coefficient 4: 1.
- Metric thread.
- It should be bolted on a flat surface



Note: Manufactured in grade 80 steel.


MODEL	DIN 13 PITCH	A	B	C	D	WEIGHT
M 6	1,00	28	13	16	42	0,04
M 8	1,25	36	15	20	51	0,05
M 10	1,50	45	18	25	63	0,11
M 12	1,75	54	22	30	75	0,19
M 16	2,00	63	28	35	88	0,29
M 20	2,50	72	30	40	101	0,50
M 24	3,00	90	38	50	128	0,95
M 30	3,50	108	45	60	154	1,76
M 36	4,00	126	55	70	183	3,70
M 42	4,50	144	65	80	212	4,20
M 48	5,00	166	70	90	238	6,35

WORKLOAD BASED ON ANGLES AND NUMBERS OF FASTENING POINT							
No OF EYEBOLTS		1		2		3-4	
		M.W.L.		M.W.L.		M.W.L.	
MAX. WORK LOAD (KG)		T	T	T	T	T	T
CODE	THREAD	0°	0 - 45°	45° - 60°	0 - 45°	45° - 60°	
PCHM 06	M6	0,40	0,14	0,10	0,21	0,15	
PCHM 08	M8	0,80	0,28	0,20	0,42	0,30	
PCHM 10	M10	1,00	0,35	0,25	0,52	0,37	
PCHM 12	M12	2,00	0,70	0,50	1,05	0,75	
PCHM 16	M16	4,00	1,40	1,00	2,10	1,50	
PCHM 20	M20	6,00	2,10	1,50	3,15	2,25	
PCHM 24	M24	8,00	2,80	2,00	4,20	3,00	
PCHM 30	M30	12,00	4,20	3,00	6,30	4,50	
PCHM 36	M36	16,00	5,60	4,00	8,40	6,00	
PCHM 42	M42	24,00	8,40	6,00	12,60	9,00	
PCHM 48	M48	32,00	11,20	8,00	16,80	12,00	


RECOMMENDED ACCESSORIES



SLING "DOL"
Pag. 84



WEBBING SLINGS
Pag. 94



ROUND SLINGS
Pag. 95