

# EC4 MODEL

## ONE SPEED ELECTRIC CHAIN HOISTS

### ONE SPEED



EC4 500 Kg.

### Features:

- IP-54 protection of the motor, IP-65 protection of the keypad.

### Note:


- Make sure that the power, voltage and frequency are adequate.
- Design, materials and specifications are subject to change without prior Notification for reasons of improvement.
- JAGUAR electric hoists are not designed for lifting people and should not be used for this purpose.

### OPTIONAL

- Remote control for all models
- Stainless steel chains.
- Stainless steel rotary hook for models of 250kg 500kg and 1.000kg

**EC4 · 250 Kg. - 500 Kg.**  
**1.000 Kg. - 3.000 Kg.**  
(schematic only)


**EC4 · 2.000 Kg. - 5.000 Kg.**  
(schematic only)

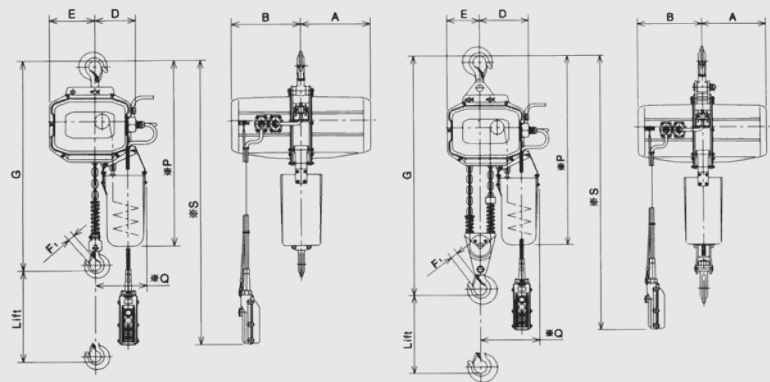

### STANDARD SPECIFICATIONS: MOD. EC4, ELECTRIC HOIST ONE SPEED, THREE-PHASE, MONOTENSION

CAPACITY (Kg)	ELEVATION (m)	SPEED OF LIFTING (m/MINUTE)		POWER OF MOTOR ELEV. (KW)		SERVICE (MIN.)	CHAIN		HEIGHT (MAX.) G (mm)	TEST LOAD (Kg)	WEIGHT NET APPROX. (Kg)	MAIN DIMENSIONS (mm)						
		50 HZ	60 HZ	50 HZ	60 HZ		DIA. (MM.)	No. OF LEGS				A	B	D	E	F	P	Q
250	3	8,7	10,3	0,4	0,5	30	6,3	1	485	315	35	245	245	137	149	20	660	195
500	3	8,6	10,1	0,9	1,1		6,3	1	520	625	37	245	245	137	149	20	660	195
1.000	3	5,6	6,6	1,1	1,3		7,1	1	570	1.250	49	255	255	150	180	25	710	200
2.000	3	2,8	3,3	1,1	1,3		7,1	2	755	2.500	60	255	255	191	135	30	770	240
3.000	4	4,4	5,2	2,5	3,0		11,2	1	765	3.750	106	335	335	195	135	36	950	235
5.000	4	2,6	3,1	2,5	3,0		11,2	2	925	6.250	132	335	335	247	135	43	960	290

### RECOMMENDED ACCESSORIES



**MULTIPOSITION CLAMPS**  
BT MODEL  
Pag. 36



**SLING "DOL"**  
Pag. 80



**SIMPLE POSITION CLAMPS**  
B MODEL  
Pag. 37



**CRANE SCALES**  
GPJ MODEL  
Pag. 70